


# VACUUM MONOPOLAR CONTACTOR 1500 Va.c. - 50 Hz - 630 A

**Manufacturing code : CMCV – 1500V – 630A**  
**Company standard : S.T. 590/1-2004**

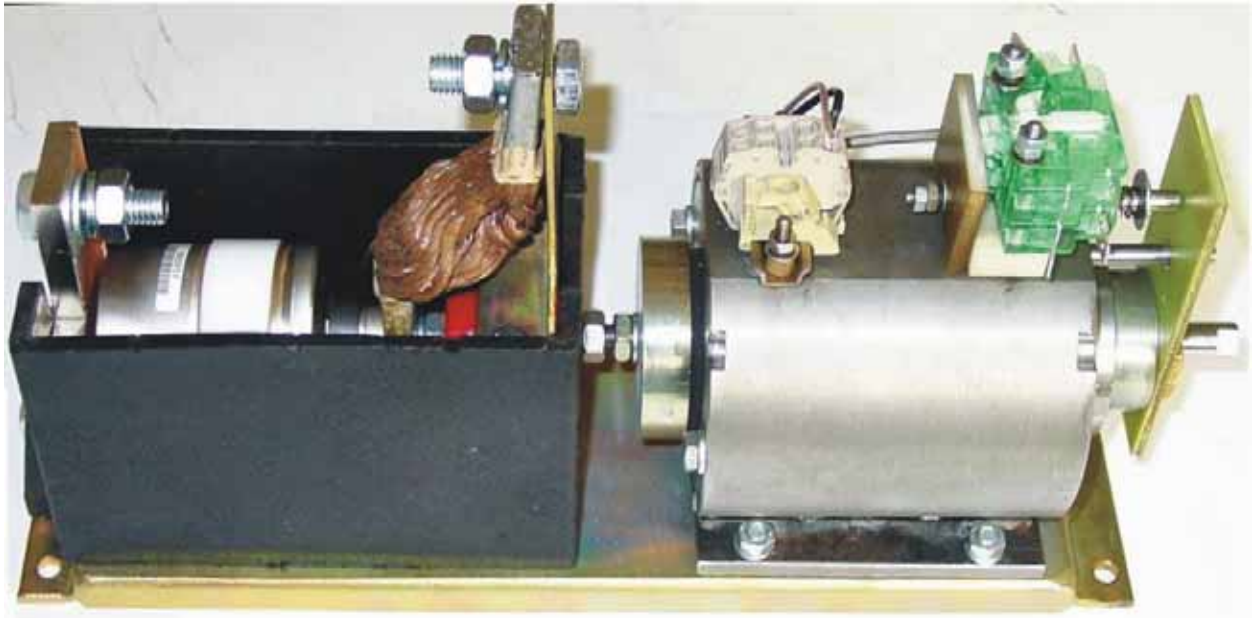

**Manufacturing according to certified assurance systems: ISO 9001**

**Technical performances according to European and/or international standards/norms: SR EN 60 947/2001**

No.	Technical data	U/M	Value
1	Insulating rated voltage	kV	3,5
2	Maximum application voltage	kV	1,5
3	Rated current	A	630
4	Rated making and breaking capacity for 1,5 kV	A	6000
5	Switching categories - main contact - AC 1 - auxiliary contact - AC15 - DC13		1500Va.c. – 630A 230Va.c. - 7A - $\cos\Phi=0,8$ 110Vd.c. - 2A - $\zeta=5ms$
6	Mechanical life	operations	1.500.000
7	Electrical life	operations	500.000
8	Electromagnetic control voltage	Vd.c.	24,48,110,220
9	Overall sizes	mmxmmxmm	100x340x180
10	Weight	kg	~8,5

# OVERALL SIZES

