

High voltage fuse-links for electrical railway traction type FV-1,5 kV - 2 ... 40 A

Applications: Protection of heating installations circuits in rail-coaches.

Operating conditions

- Temperature: -25° C ... +40° C
- Storage temperature: -30 ... + 40° C
- Relative humidity: (92 ... 98)% at 25° C
- Shock: 4000 shocks 10 g at 0,016 s

Overall dimensions: Ř 60/190, Ř 62/255, Ř 78/225



Manufacturing according to certified assurance systems: [ISO 9001](#)

Technical performances according to European and/or international standards/norms: [U \(1990\)](#); [IEC 282-1 \(1994\)](#).



TECHNICAL FEATURES

Type	FV-1.5/ 2-6-20-40 A			
Rated voltage	1.5 kV a.c.			
Rated current [A]	2	6	20	40
Rated breaking current [kA]	25			
Overall dimensions [mm]	Ø60/190	Ø60/190	Ø62/255	Ø78/255
Weight [kg]	0.63	0.63	1.5	2.2

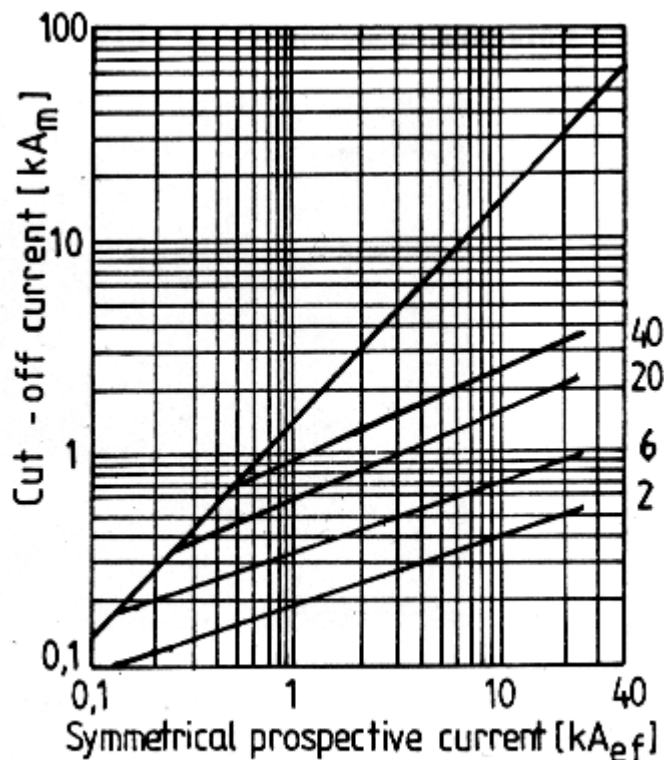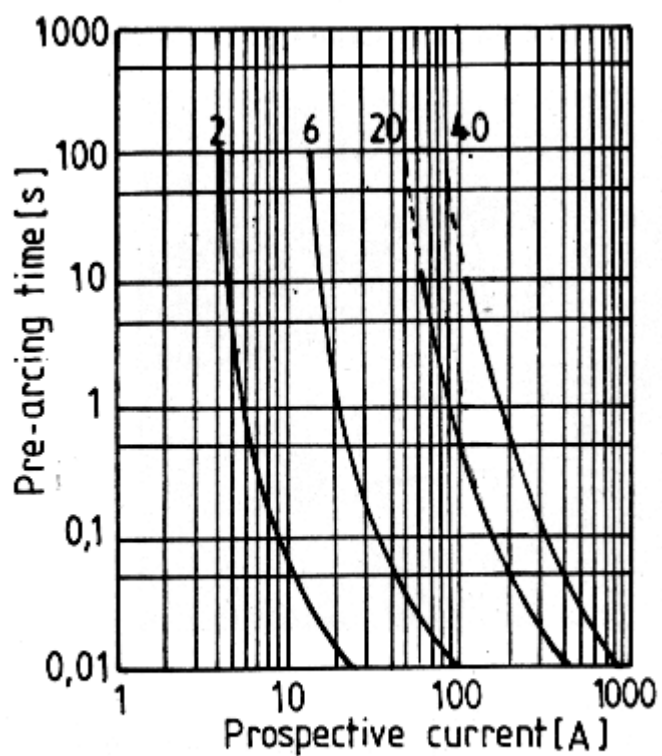

Characteristics for fuse-links type FV $U_n=1.5\text{ kV}$ $I_n=2-6-20-40\text{ A}$