


Wire Extrusion Machine (Wire Extruder)

Characteristics of the extruder, model MONOVITE AMUT EA30

1	Screw	diameter	mm	30
		length	L/D	24
		type		30.24.G4
		A-Gear speed	rpm	-
		B-Gear speed	rpm	-
		speed range	rpm	15,8-158,5
2	Barrel + Screw	alloy steel		38CrAlMo7
		surface hardness HV		1000
3	Gear Box	gear ratio		1:5,166
4	Pulleys ration			1:2,68
5	Drive belts	type		1762 SPZ
		quantity		4
6	Thrust bearing		kP	26000
7	Barrel heaters		kW	4
8	Heating zones			2
9	Air cooling zones			2
10	Drive motor	Drive motor, asynch, A.C.-		-
		Drive motor, var. speed A.C.		-
		Drive motor, var. speed D.C.		x
		Power	kW	6.3
		Speed range		01:10
11	Venting	Pump power	kW	-
		Capacity	c um/h	-
		Vacuum	mmHg	-




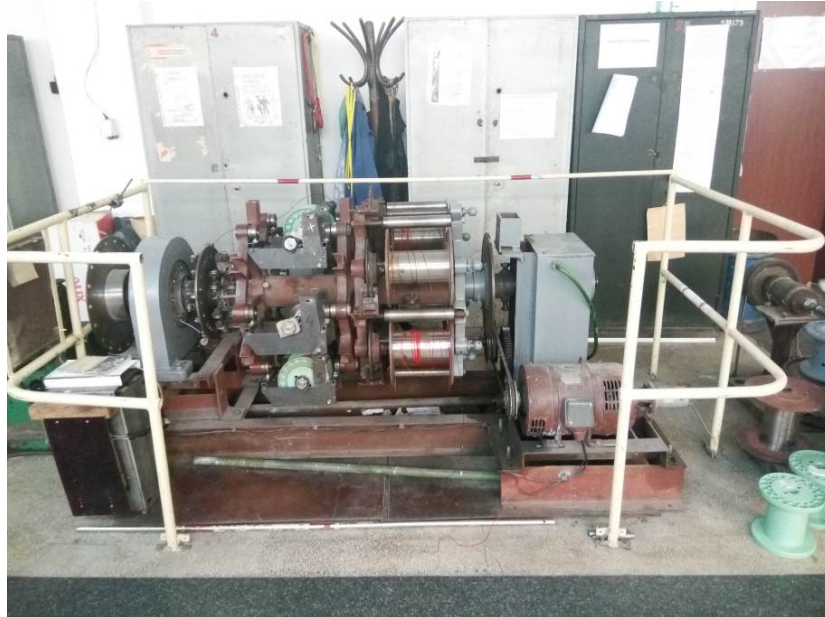

Clients portfolio

ROMARM

National company for military technique

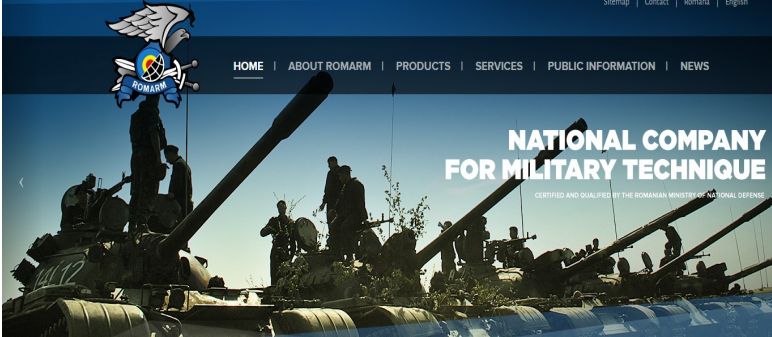

ELECTRO-OPTIC COMPONENTS

Mechanical, electric, electronic and optic components, parts and assemblies for civil and / or military applications
Complex systems for defense and security
Complex cable systems for civil and / or military applications



AEROFINA

SC Aerofina SA - research, production and testing of military and civilian equipment



WEATHERFORD

Oil and gas service company with a presence in every major oil and gas region of the world.

