




Brushless Resolver : 08-RX-20-2-0.454

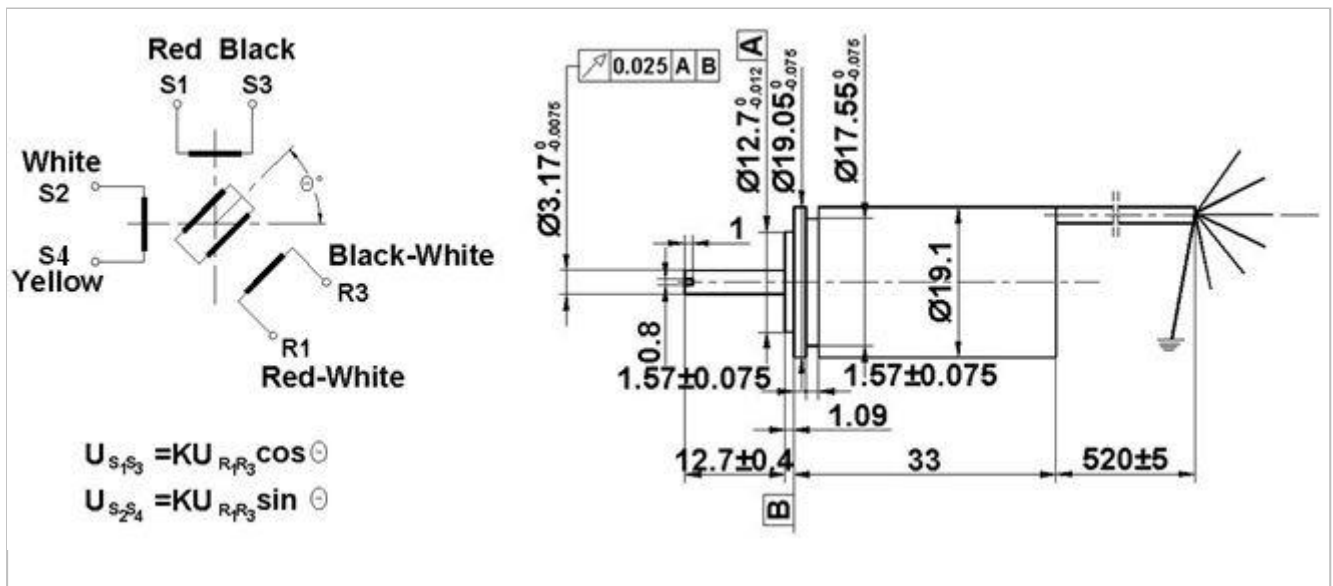

Electrical Parameters

Parameter	Units	Value
Primary Winding	-	Rotor
Input Voltage	V	4.4
Frequency	Hz	2000
Input Current	mA	8 max.
Transformation Ratio	-	$0.45 \pm 5\%$
Accuracy	min. of arc	$\pm 5 / 7 / 12$
Null Voltage	mV	10 max.
Stator Resistance	Ω	74 ± 7.4
Rotor Resistance	Ω	57 ± 5.7
Weight	g	70 max.



Leads AWG 28 teflon coated; 300 mm minimum length.

Insulation resistance @ 500 V D.C., min 100 M Ω .

All measurements are made at 25 °C ambient temperature.

Mounting dimensions and color of wires can be changed in conformity with customer requirement.

icpe www.icpe.ro e-mail: office@icpe.ro

phone: +40 21 589 33 00 fax: +40 21 589 34 34

icpe C4 –messico www.icpe.ro/messico e-mail: messico@icpe.ro

phone: +40 21 589 34 09 fax: +40 21 346 72 90

