BRUSHLESS RESOLVER TYPE **08-RE.1**

ELECTRICAL PARAMETERS:

• Supply voltage	7 V ± 5%
• Frequency	10 kHz± 1%
• Input current	max.30 mA
• Peak to peak electrical error	max. 30 min of arc
• Transformation ratio	0.5 ± 5%
• Phase shift	max.14 grd
• Null voltage	max.50 mV
• Weight	max.30 g

SCHEMATIC DIAGRAM

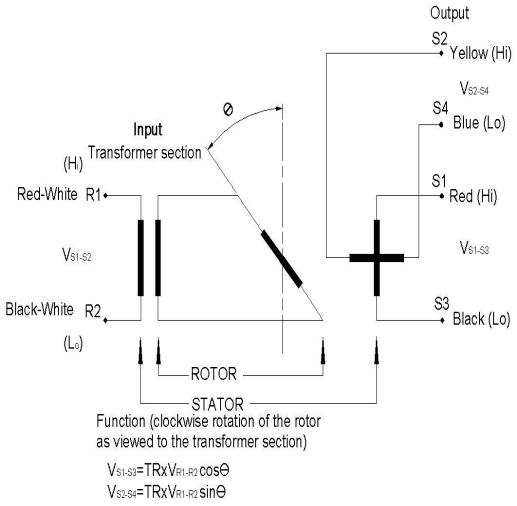

OVERALL DIMENSIONS

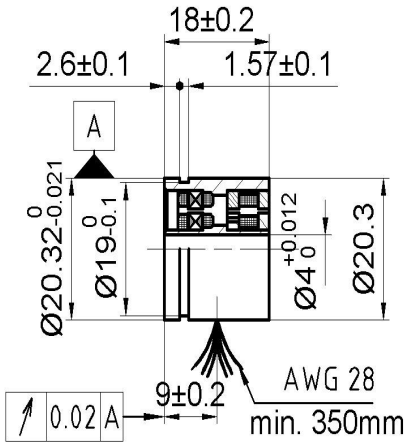

The BRUSHLESS RESOLVER is manufactured to meet the requirements of SR EN ISO 9001/2001 ; 14001/2005

ICPE C4-Messico
PHONE: +40 21 589 34 09;
FAX: +40 21 346 72 90;
e-mail: messico@icpe.ro

ICPE SA ELECTRICAL ENGINEERING Co.
RESEARCH AND DEVELOPMENT
MANUFACTURING
INTERNATIONAL BUSINESS
313 Splaiul Unirii, 030138 Bucuresti, ROMANIA
Tel.:+40 21 5893300; Fax:+40 21 5893434; e-mail:icpe.sa@icpe.ro; http://www.icpe.ro