

High speed cylindrical fuses 1000 Vdc 6 ... 63 A


Operating conditions: Normal

Applications: Protection of high power semiconductor devices


Manufacturing according to certified assurance systems: ISO 9001

Technical performances according to European and/or international standards/norms:
IEC 60269-1; IEC 60269-4; VDE 0636-23.

Note: At your demand we can make and deliver the fuses with trip indicator, without trip indicator.

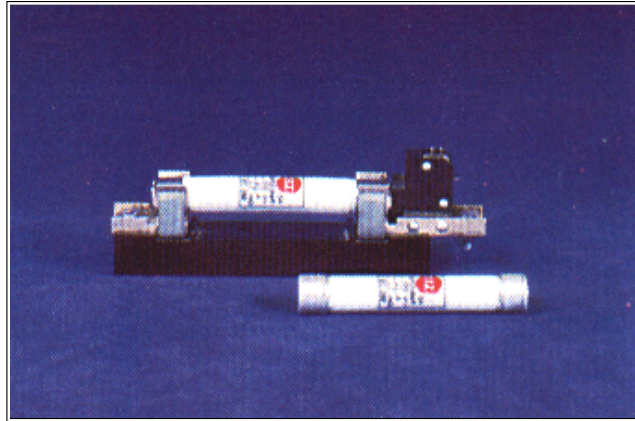


TIME - CURRENT CHARACTERISTICS

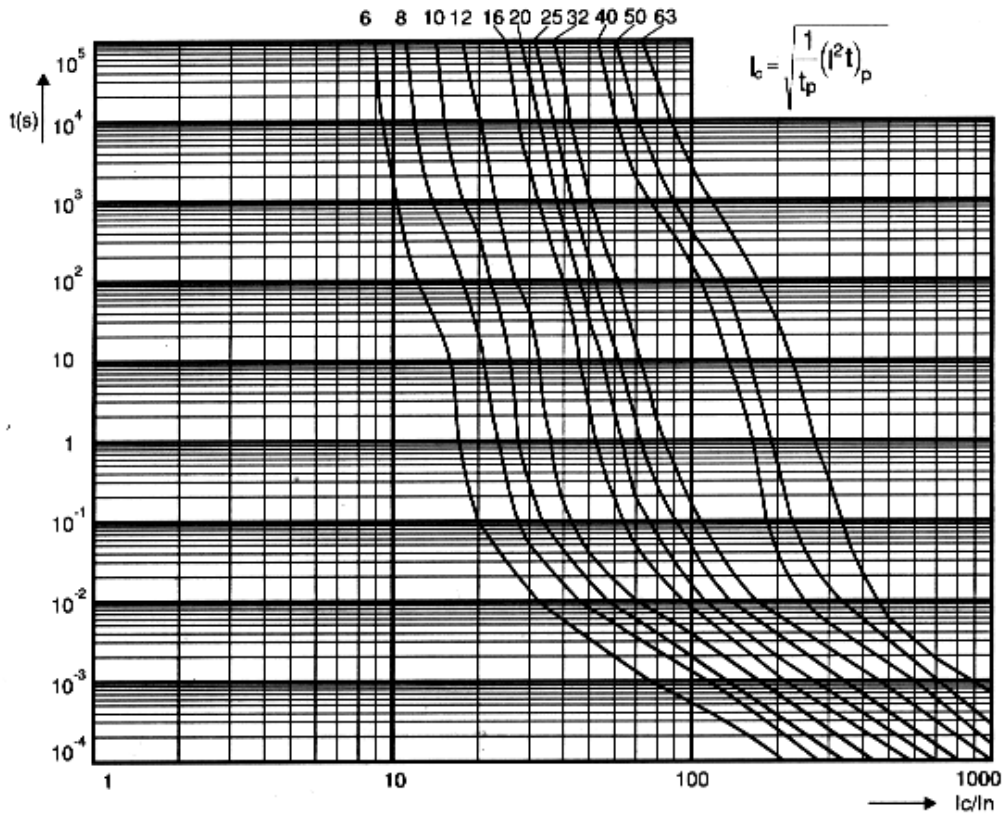

Conformity to standards:
IEC 269/1,4; VDE 0636/23;
STAS 4173/1-1990; SF 124/1995

Cut-off characteristics

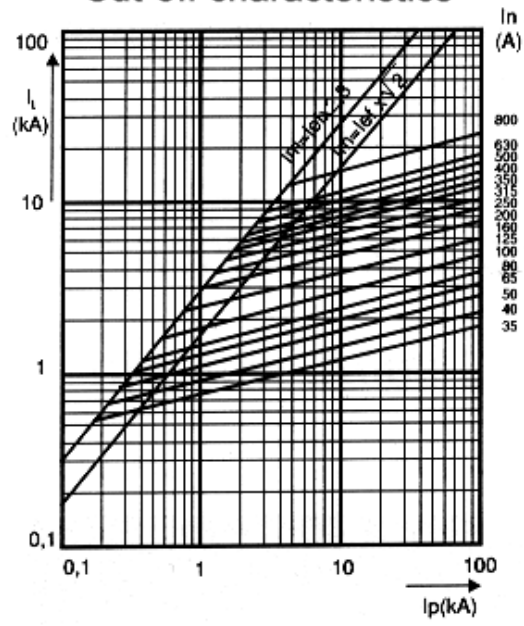

DIMENSIONS

