

AC servo motors – BSM series

Technical data

- High energy Nd-Fe-B magnets
- 6 (six) magnetic poles
- Insulation Class F
- Standard Feedback System: Resolver
- Winding Protection with PTC
- Standard protective structure is IP55 class

Features

- Torque ranges from 0.1 to 30 Nm
- Maintenance free
- High demagnetization level
- Low ripple torque
- High torque to weight ratios
- Superior low speed performance
- Very low inertia

Options

- Shaft with Keyway according to DIN 6885
- Fail safe Brake 24 VDC
- Shaft Seal Ring
- Additional Feedback Systems (Encoder)
- Protection Class IP 65
- Custom windings
- Special dimensions and configurations


Size	A J6	B	C	D k6	E	F	H	K	K1	M	O	P	R	S1	S2	T1	T2 h9	U h9	U1
0.1	40	63	5,8	9	24	2,5	55	98	131	55	8	74	M3.10	39	39	7,2	3	3	14
0.2	40	63	5,8	9	24	2,5	55	123	156	55	8	74	M3.10	39	39	7,2	3	3	14
0.3	40	63	5,8	9	24	2,5	55	143	176	55	8	74	M3.10	39	39	7,2	3	3	14
0.4	40	63	5,8	9	24	2,5	55	163	196	55	8	74	M3.10	39	39	7,2	3	3	14
0.5	40	63	5,8	9	24	2,5	55	233	266	55	8	74	M3.10	39	39	7,2	3	3	14
1.1	80	100	7	14	30	3	88	112	152	82	10	115	M4.12	36	36	11,1	5	5	20
1.2	80	100	7	14	30	3	88	132	172	82	10	115	M4.12	36	36	11,1	5	5	20
1.3	80	100	7	14	30	3	88	152	192	82	10	115	M4.12	36	36	11,1	5	5	20
1.4	80	100	7	14	30	3	88	172	212	82	10	115	M4.12	36	36	11,1	5	5	20
1.5	80	100	7	14	30	3	88	202	242	82	10	115	M4.12	36	36	11,1	5	5	20
2.1	95	115	9	19	40	3	105	178	218	105	12	135	M6.15	39	39	15,5	6	6	30
2.2	95	115	9	19	40	3	105	208	248	105	12	135	M6.15	39	39	15,5	6	6	30
2.3	95	115	9	19	40	3	105	228	268	105	12	135	M6.15	39	39	15,5	6	6	30
2.4	95	115	9	19	40	3	105	278	313	105	12	135	M6.15	39	39	15,5	6	6	30
3.0	130	165	11	24	50	3,5	145	220	263	145	12	188	M8.25	39	39	19,9	8	8	40
3.1	130	165	11	24	50	3,5	145	260	303	145	12	188	M8.25	39	39	19,9	8	8	40
3.2	130	165	11	24	50	3,5	145	300	343	145	12	188	M8.25	39	39	19,9	8	8	40
3.3	130	165	11	24	50	3,5	145	420	463	145	12	188	M8.25	39	39	19,9	8	8	40

Dimensions in mm

Size	Dim.	P _N [kW]	M _N [Nm] ²⁾	Mo[Nm] ²⁾	Momax[Nm] ¹⁾	I _n [A]	I _o [A]	J [kgcm ²]	m[kg]	m+BR[kg]	R[Ω] ³⁾	L[mH] ³⁾	k _E [V] ³⁾	k _r [Nm/A]
BSM 55 - 0020 - 3	0.1	0.04	0.13	0.2	0.8	0.3	0.4	0.05	0.83	1.2	122	66.5	30	0.5
BSM 55 - 0050 - 3	0.2	0.11	0.35	0.5	1	0.8	1.2	0.1	1.3	1.6	18,3	13	26	0.43
BSM 55 - 0070 - 3	0.3	0.16	0.5	0.7	2.8	1.1	1.5	0.15	1.6	1.8	11.9	14.3	28	0.46
BSM 55 - 0070 - 6	0.3	0.16	0.5	0.7	2.8	0.6	0.9	0.15	1.6	1.8	32	28	47	0.78
BSM 55 - 0085 - 3	0.4	0.23	0.74	0.85	3.4	1.6	1.8	0.2	1.9	2.2	8.9	9.3	28	0.46
BSM 55 - 0085 - 6	0.4	0.23	0.74	0.85	3.4	0.9	1.0	0.2	1.9	2.2	28	23	50	0.83
BSM 55 - 0150 - 3	0.5	0.42	1.35	1.5	6	2.9	3.3	0.33	2.8	3.1	3.8	4.6	28	0.46
BSM 55 - 0150 - 6	0.5	0.42	1.35	1.5	6	1.6	1.8	0.33	2.8	3.1	13.7	13.9	51	0.84
BSM 88 - 0100 - 3	1.1	0.21	0.66	1	4	1.5	2.3	0.3	2	2.8	6.3	14.3	26	0.43
BSM 88 - 0100 - 6	1.1	0.21	0.66	1	4	0.9	1.4	0.3	2	2.8	18.4	39	44	0.73
BSM 88 - 0170 - 3	1.2	0.35	1.1	1.7	6.2	2.2	3.4	0.68	2.9	3.7	3.3	9.2	30	0.5
BSM 88 - 0170 - 6	1.2	0.35	1.1	1.7	6.2	1.3	2.0	0.68	2.9	3.7	7.7	24	50	0.83
BSM 88 - 0260 - 3	1.3	0.57	1.8	2.6	10.4	3.6	5.2	1	3.7	4.5	1.7	6	30	0.5
BSM 88 - 0260 - 6	1.3	0.57	1.8	2.6	10.4	1.8	2.7	1	3.7	4.5	5.2	16.7	59	0.98
BSM 88 - 0350 - 3	1.4	0.79	2.5	3.5	14	4.5	6.4	1.4	4.3	5.5	1.1	4.3	33.5	0.55
BSM 88 - 0350 - 6	1.4	0.79	2.5	3.5	14	2.9	4.1	1.4	4.3	5.5	2.8	11	52	0.86
BSM 88 - 0420 - 3	1.5	1.01	3.2	4.2	16.8	5.8	7.6	1.8	5.4	6.7	0.8	3.2	33	0.55
BSM 88 - 0420 - 6	1.5	1.01	3.2	4.2	16.8	3.5	4.6	1.8	5.4	6.7	2.4	9.3	55	0.91
BSM 105 - 0450 - 3	2.1	1.10	3.5	4.5	18	6.0	7.8	2.4	6	6.9	1	5.5	35	0.58
BSM 105 - 0450 - 6	2.1	1.10	3.5	4.5	18	3.5	4.5	2.4	6	6.9	2.8	13.6	60	0.99
BSM 105 - 0650 - 3	2.2	1.63	5.2	6.5	26	10.4	13.0	3.2	7.6	9.5	0.4	2.5	30	0.5
BSM 105 - 0650 - 6	2.2	1.63	5.2	6.5	26	4.6	5.8	3.2	7.6	9.5	2	11.3	68	1.12
BSM 105 - 0750 - 3	2.3	2.14	6.8	7.5	30	12.4	13.6	3.6	8.5	11.4	0.47	1.9	33	0.55
BSM 105 - 0750 - 6	2.3	2.14	6.8	7.5	30	6.9	7.6	3.6	8.5	11.4	1.5	8.4	60	0.99
BSM 105 - 1000 - 6	2.4	2.73	8.7	10	40	9.8	11.2	4.5	16	19	0.8	4.4	54	0.89
BSM 145 - 1500 - 6	3.1	3.46	11	15	30	11.5	15.6	5.3	19.5	24	0.6	6.1	58	0.96
BSM 145 - 2000 - 6	3.2	4.71	15	20	40	19.0	25.3	6.7	22	28	0.3	3.2	48	0.79
BSM 145 - 3000 - 6	3.3	6.91	22	30	60	20.4	27.8	11.2	30	34	0.3	3.8	65	1.08

Nominal speed = 3000 rpm

Torque v. speed

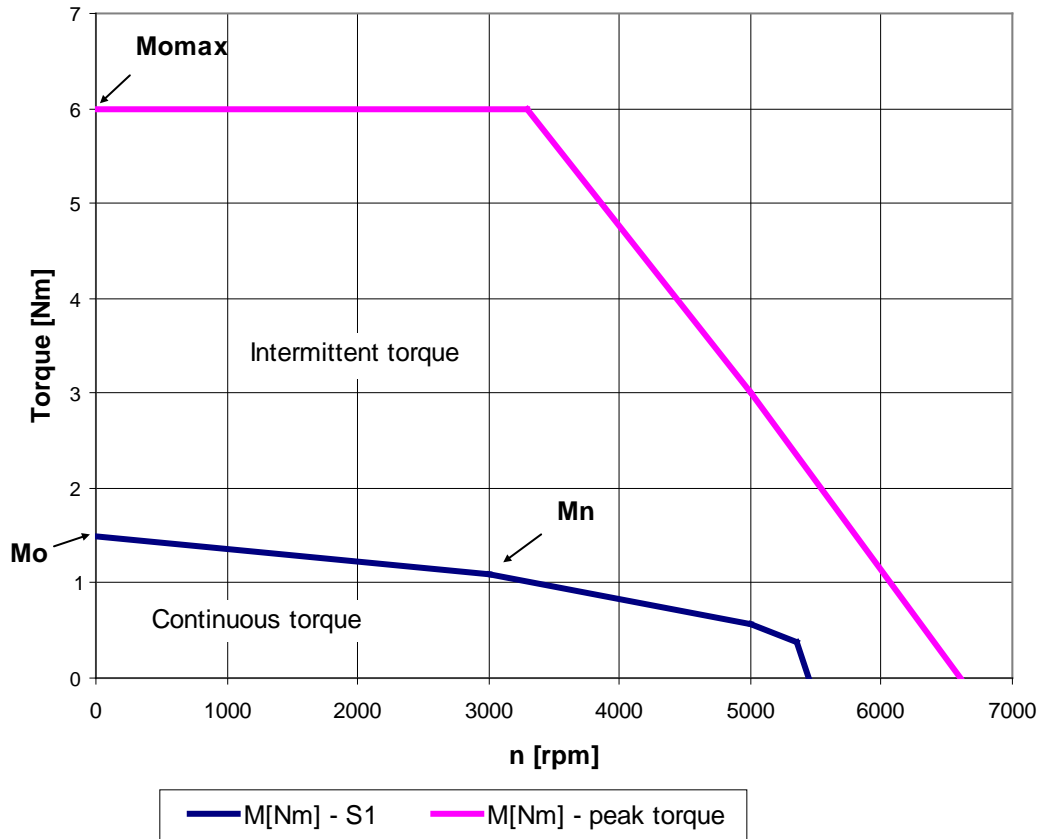

n_N - Nominal speed

P_N - Nominal power

M_N - Nominal torque

M_o - Static torque - continuous standstill torque

M_{max} - Maximum static torque - maximum intermittent static torque

I_N - Nominal current ($\pm 10\%$)

I_o - Static current ($\pm 10\%$)

J - Moment of inertia including resolver (without brake)

m - Weight of the motor (weight of the motor with brake)

R - Line to line motor resistance (25°C) ($\pm 10\%$)

L - Line to line motor inductivity ($\pm 20\%$)

k_E - Electromotive force [V] at 1000 rpm ($\pm 10\%$)

k_T - Torque constant ($\pm 10\%$)

1) Peak torque for ms

2) Motor mounted on a metallic flange with an area equal to twice the cross section of the housing

3) Values measured at 25 °C

Societatea pe acțiuni Icpe

Splaiul Unirii 313, 030138-București
 tel 021 589 3300 | fax 021 589 3434
 e-mail office@icpe.ro

RO 423140 | J40/21438/92
 RO92 CARP 0452 P006 5844 R001
 Patria Bank - Sucursala Tineretului